
VIBRATION RANGE

VEAF

High frequency external vibrators



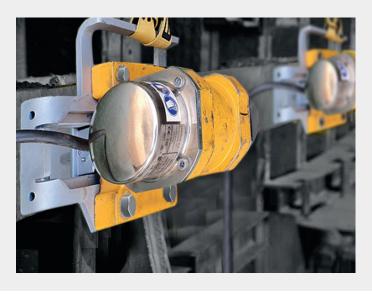

Adjustable force

The different models and the eccentric regulation allow adjustment to a wide range of needs.



IP65 Protection

Hermetic housing that protects the external agents such adverse as dust and rain



Resistant

Long life high-strength Optional aluminum housing, equipment against that performs in different formworks, conditions.



Quick coupling

clamps compatible working saving time in assembly and operation.

- The clamp counts with a safety strap
- Compatible with different types of formworks
- High load capacity bearings, lubricated with special "long-life" greases
- For all kinds of uses: Precast, formwork, hoppers, tables, belts and vibrating screens...



Technical Data

MODEL	Weight (kg)	Centrifugal force (Kg)	Rated current (A)	Oscillations (r.p.m.)	Dimensions CxDxE (mm)	Fixing dimensions AxB (mm)	Cord (m)	Connexion	Diameter Ø G (mm)
VEAF 65	9	650	12	6000	260x160x140	125x90	10	*	12.5

^{*}Possibility of coupling a Spyder Pro or i-Spyder. (Those ones have a 230v~50/60Hz connection supply versus the 42v of the standard VEAF