


VIBRATION RANGE

VEAF 300

High frequency external vibrators



+ Adjustable force

The different models and the eccentric regulation allow adjustment to a wide range of needs.




+ IP65 Protection

Hermetic housing that protects the equipment against external agents such as dust and rain



+ Resistant


Long life high-strength aluminum housing, that performs in adverse working conditions.



+ Quick coupling

Optional clamps compatible with different formworks, saving time in assembly and operation.

- The clamp counts with a safety strap
- Compatible with different types of formworks
- High load capacity bearings, lubricated with special "long-life" greases
- For all kinds of uses: Precast, formwork, hoppers, tables, belts and vibrating screens...

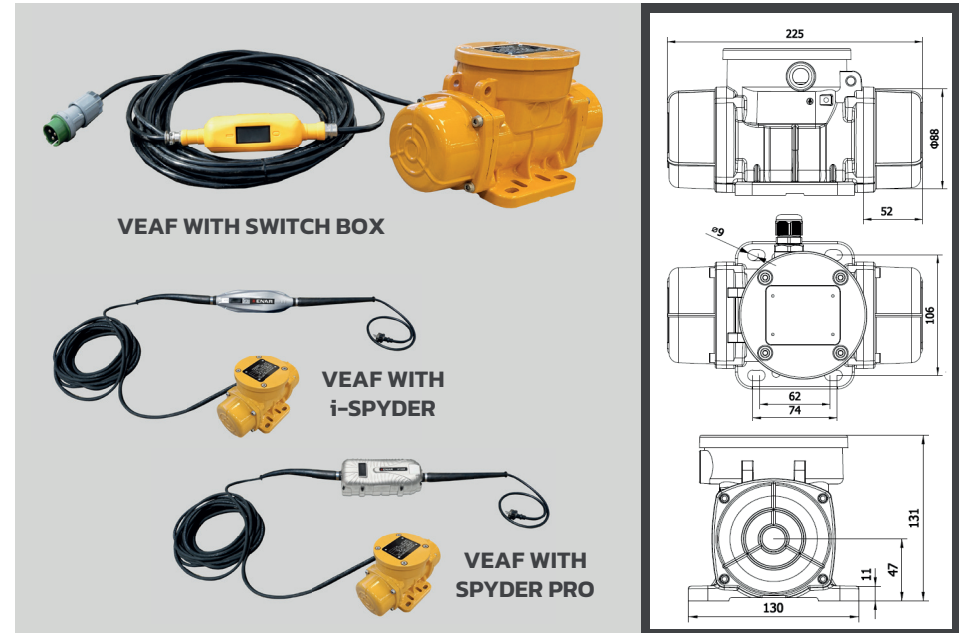

Technical Data

MODEL	Weight (kg)	Centrifugal force (Kg)	Power (W)	Oscillations (r.p.m.)	Dimensions Long x Wi x High (mm)	Fixing Dimensions Wi x High (mm)	Cord (m)	Tension Frequency	Switch
VEAF 300 42V	6.6	0-300	270	6000	225x130x131	62-74x106	10	42V 3Ph 200Hz	No
VEAF 300 42V SWITCH	7.3	0-300	270	6000	225x130x131	62-74x106	10	42V 3Ph 200Hz	Yes
VEAF 300 230V i-SPYDER	11.4	0-300	270	6000	225x130x131	62-74x106	10	230V 1Ph 50-60Hz	Yes
VEAF 300 230V SPYDER PRO	11.4	0-300	270	6000	225x130x131	62-74x106	10	230V 1Ph 50-60Hz	Yes